

RML Example 0: Catchforms




RML (Report Markup Language) is ReportLab's own language for specifying the appearance of a printed page, which is converted into PDF by the utility rml2pdf.

These RML samples showcase techniques and features for generating various types of output and are distributed within our commercial package as test cases. Each should be self explanatory and stand alone.

Hello World. This is a normal paragraph. Blah IPO blah blah blah growth forecast blah blah forecast blah. Blah blah blah blah blah blah blah profit blah blah blah blah IPO. Blah blah blah reengineering blah growth blah proactive direction strategic blah forward-thinking blah. Blah doubletalk blah profit blah growth blah profit. Blah venture capital blah forward-thinking blah.

RML Example 0: Catchforms


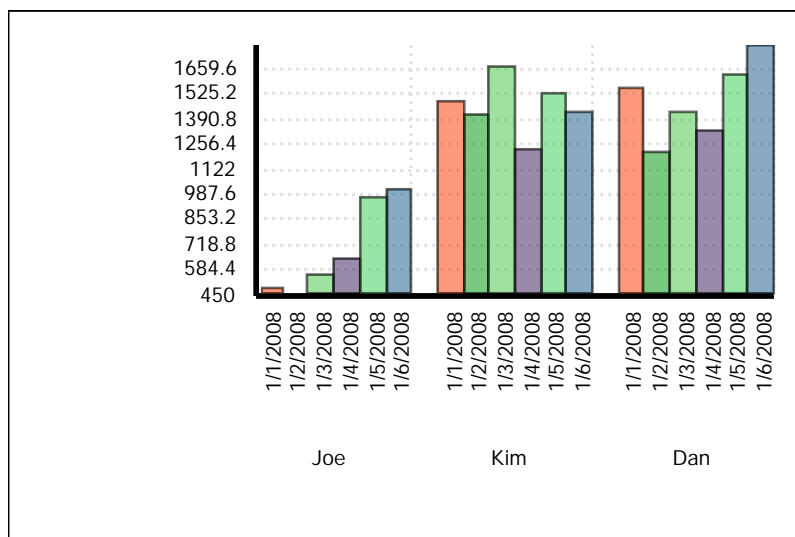


RML Example 0: Catchforms



This is another normal paragraph. Blah IPO blah blah blah growth forecast blah blah forecast blah. Blah blah blah blah blah blah blah profit blah blah blah blah IPO. Blah blah blah blah reengineering blah growth blah proactive direction strategic blah blah forward-thinking blah. Blah blah doubletalk blah blah profit blah growth blah blah profit. Blah blah venture capital blah forward-thinking blah.

RML Example 0: Catchforms

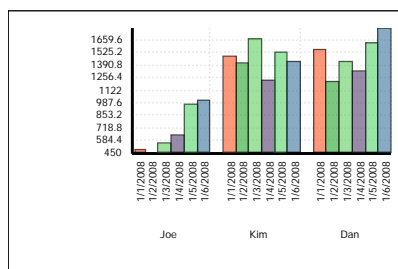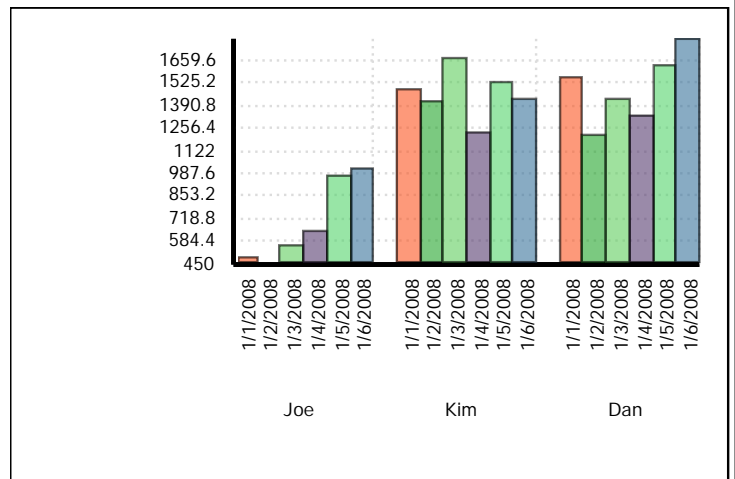

RML Example 0: Catchforms



Hello World. This is a normal paragraph. Blah IPO blah blah blah growth forecast blah blah forecast
blah.Blah blah blah blah blah blah blah profit blah blah blah blah blah blah blah
IPO.Blah blah blah blah blah reengineering blah growth blah proactive direction strategic blah
blah forward-thinking blah.Blah blah doubletalk blah blah profit blah growth blah blah
blah profit.Blah blah venture capital blah blah forward-thinking blah.

RML Example 0: Catchforms



_placeString

placeRightString_

placeCentredString

_placeString

placeRightString_

placeCentredString

RML Example 0: Catchforms



`placePara x="72" y="72" width="200" anchor="sw" origin="page"`

`placePara x="72" y="72" width="200" anchor="s" origin="page" alignment="right"`

`placePara x="72" y="72" width="200" anchor="se" origin="page" alignment="center"`

+

+

+

drawString

drawRightString

drawCentredString

drawString

drawRightString

drawCentredString

ומש לע טנרטניא תסדנה.

ומש לע טנרטניא תסדנה

ומש לע טנרטניא תסדנה.

ומש לע טנרטניא תסדנה.

ומש לע טנרטניא תסדנה

ומש לע טנרטניא תסדנה.